

lodel: _	16-142L	Item #:	Date:
			24.0.

Qty:

Project:

Approved By:

Single Hole Wall Mount Remote 8" Swing Spout

Royal Series



DESCRIPTION

 Single Hole, Wall Mount Remote 8" Swing Spout, Polished Chrome Finish, 1.8 GPM Female Aerator Installed, and Heavy Duty Wall Mounting Kit Included

STANDARD FEATURES


- Controlled by foot or knee valve
- Durable full range swing spout with double o-ring construction
- Includes 1/2" NPT male x female close elbow, 1/2" NPS x 1-1/2" brass nipples, lock nut, and washer
- Warranty: 3 years

PRODUCT COMPLIANCE

- NSF-61 & NSF/ANSI 372
- ASME A112.18.1-2011/CSA B125.1-11 & NSF/ANSI 372
- Meets ANSI A117.1 (ADA)
- Massachusetts Approved
- CEC Approved



SPECIFICATIONS	
Water Inlet	1/2" NPS Female
Temp. Range	40°F - 180°F
Pressure	20-120 PSI
Rough In	7/8" Round Hole
Flow Rate	1.8 GPM
Material	Solid Brass
Finish	Polished Chrome
Weight	2 lbs.

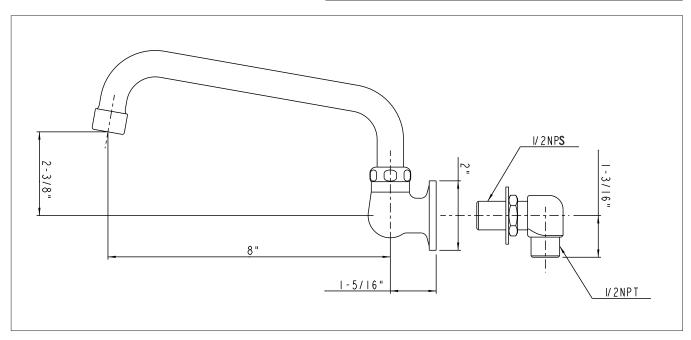

WARNING: Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes. California Proposition 65 Warning