

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

P-SERIES TOP MOUNT PASS-THRU REFRIGERATOR

PRD3HC-1BG Glass Door Pass-Thru Hydrocarbon Series

MODEL: PRD3HC-1BG



3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior stainless steel front and side (galvanized top, bottom & back)
- Interior is made of corrosion resistant aluminum
- Full electronic control
- · Expansion valve technology
- Variable speed compressor technology
- · Self-closing doors with 120° stay-open feature
- · Glass pass-thru door
- · LED interior light
- · Cylinder locks
- · Snap-in magnetic gaskets for positive door seal
- · Hinged front shroud
- · Energy saving thermal breaker
- · Stainless steel breaker caps
- 9 Heavy-duty epoxy wire coated shelves
- 6" High adjustable stainless steel legs
- 8' Cord and plug (see electrical data for details)

OPTIONS & ACCESSORIES

- Stainless steel case back
- · Additional shelves
- · Shelf clips
- 3" or 6" Casters
- 6" Seismic legs
- Tray slides (type A & A/C)
- · Door swing orientation (at time of order)
- Remote option* (see note back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil, located out of the food zone
- Refrigerator capable of maintaining product temperature 36°F to 38°F




















MODEL	PRD3HC-1BG
EXTERNAL DIMENSIONAL DATA	
Width Overall	77 ¾"
Depth Overall with Handle	36"
Height Overall	84 ½"
Number of Doors	6
Depth with Door Open 90°	83 ½"
Door Opening (in)	21 ½" x 54 ¾"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	73.99
Internal Width Overall (in)	73 ¾"
Internal Depth Overall (in)	26"
Internal Height Overall (in)	56 ½"
No. of Shelves	9
ELECTRICAL DATA	
Full Load Amperes* 115/60/1	10.8
REFRIGERATION DATA	
Horsepower	(2) 1/3
Capacity (BTU/Hr)	5600
SHIPPING DATA	
Gross Weight (crated lbs)	1095 lbs
Height - Crated	88"
Width - Crated	87"
Depth - Crated	45"

^{*}NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Top Mount Pass-Thru Refrigerator

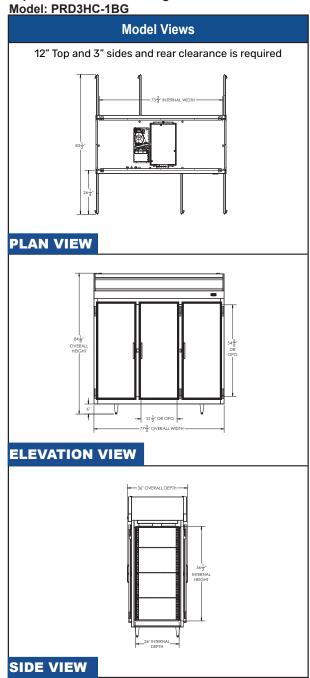



















Units pre-wired at factory and include 8' long cord



