	BEVERAGE-AIR.
--	---------------

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

FOOD PREPARATION TABLES

SPED72HC Sandwich Prep Table Hydrocarbon Series



3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides, top, door, drawer and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Removable hood made of matching stainless steel
- Airflow assures that product in open containers is kept below 41°F and above freezing
- Self-closing door with 120° Stay-open feature, on cartridge style hinges
- Easy door removal for service and cleaning
- Field-reversible door (hinge kit not included)
- Snap-In magnetic gaskets for positive door & drawer seal
- 10" Wide cutting board constructed of white polyethylene plastic
- Cutting board removable for cleaning
- Two epoxy-coated steel wire shelves per door section standard
- Eight (8) 1/6 4" deep pans constructed of polycarbonate plastic
- Pans furnished are 4" deep constructed of polycarbonate plastic
- Stainless steel drawer frames supported on telescoping drawer slides
- Drawer slides include locking mechanism that prevents drawers from being inadvertently pulled off cabinet
- 6" Casters, with (2) brakes standard

OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel interior
- Overshelves (single or double)
- Crumb catcher kit
- · Richlite cutting board
- Night cover
- Bottle organizer
- Bun rack
- Epoxy coated shelves
- Shelf clips
- · Shelf dividers
- Pan supports
- Pan support crossbar
- Pan configuration
- 6" legs or 3" casters
- Low profile casters
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- · Epoxy coated evaporator coil
- Enhanced airflow maintains temperatures between 36° 38°F




















MODEL	SPED72HC-08-4		
EXTERNAL DIMENSIONAL DATA			
Width Overall	72"		
Depth Overall	32"		
Height Overall with Casters	45 ½"		
Number Door	1		
Depth with Door Open 90°	52 1⁄4"		
Door Opening	19 ½" x 21 ⁵⁄8"		
Number Drawers	4		
Depth with Drawer Open Extended	47 %"		
Drawer Opening	19 ½" x 11 ¼"		
Drawer Opening	19 ½" x 7 ½"		
Width, Cutting Board	10"		
INTERNAL DIMENSIONAL DATA			
NET Capacity (cubic ft.)	20.0		
Internal Width Overall (in)	68"		
Internal Depth Overall (in)	15 ¾"		
Internal Height Usable (in)	16"		
No. of Shelves	2		
No. of Pans	8		
ELECTRICAL DATA			
Full Load Amperes	5.4		
REFRIGERATION DATA			
Horsepower	1/3		
Capacity (BTU/Hr)	1549		
SHIPPING DATA			
Gross Weight - Crated	450 lbs		
Height - Crated	46"		
Width - Crated	75"		
Depth - Crated	33"		

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Food Preparation Table - Standard Top

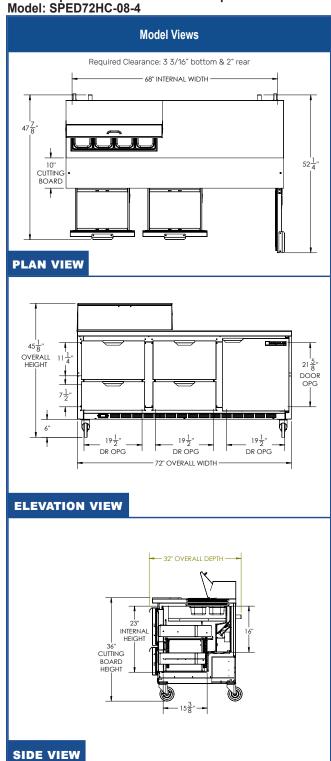

*ELECTRICAL CONNECTION



115/60/1 NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.

