

| Project: | AIA# |
|-----------|------|
| Item: | |
| Location: | SIS# |
| Approved: | |

SHALLOW DEPTH WORKTOP REFRIGERATOR

MODEL: WTR27HC-FIP

WTR27HC Solid Door With Foamed-In Place Backsplash Hydrocarbon Series



3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides, door and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Stainless steel top for added durability
- Full electronic control
- Interior thermometer is standard
- Foamed-in place backsplash
- Self-closing doors with 120° stay-open feature, on lift-off hinges
- Magnetic gasket attached to each door for positive seal
- 6" Casters, two (2) with brakes standard
- Two epoxy-coated steel wire shelves
- Field-reversible door

OPTIONS & ACCESSORIES

- Stainless steel back
- · Stainless steel interior
- 16 Gauge stainless steel top
- Additional shelves
- Shelf clips
- Glass door option
- Right or left hinged door
- Locks (solid doors only)
- Wire shelf divider
- Cutting board
- 3" Casters
- 6" legs (stainless steel, black or seismic/flange)
- · Low profile casters
- Roller kit
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- · Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F




















| MODEL | WTR27HC-FIP | |
|------------------------------------|---------------|--|
| EXTERNAL DIMENSIONAL DATA | | |
| Width Overall | 27" | |
| Depth Overall with Handle & Bumper | 29 %" | |
| Height Overall with 6" Casters | 39 %" | |
| Number of Doors | 1 | |
| Depth with Door Open 90° | 53 1⁄8" | |
| Door Opening | 22 ¾" x 21 ½" | |
| INTERNAL DIMENSIONAL DATA | | |
| NET Capacity (cubic ft.) | 5.25 | |
| Internal Width Overall (in) | 23" | |
| Internal Depth Overall (in) | 13 1⁄8" | |
| Internal Height Overall (in) | 23" | |
| Number of Shelves | 2 | |
| ELECTRICAL DATA | | |
| Full Load Amperes | 2.0 | |
| REFRIGERATION DATA | | |
| Horsepower | 1/10 | |
| Capacity (BTU/Hr) | 1110 | |
| SHIPPING DATA | | |
| Gross Weight - Crated | 192 lbs | |
| Height - Crated | 43" | |
| Width - Crated | 30" | |
| Depth - Crated | 32" | |

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Worktop Refrigerator - Shallow Depth Models: WTR27HC-FIP

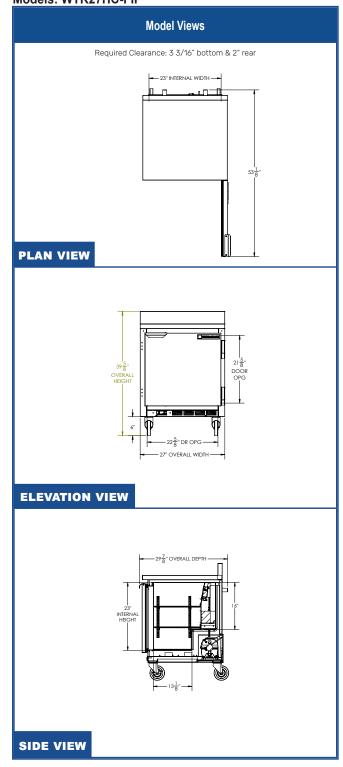

*ELECTRICAL CONNECTION



115/60/1 NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.

