# BACK BAR EQUIPMENT

# Model: KC59NSS

Natural Refrigerant R-290 Model

# 59" Keg Cooler

Stainless steel exterior, countertop, interior back and side panels with reinforced stainless steel floor.




## **Options and Accessories**

(upcharge and lead times may apply)

Epoxy-coated or stainless steel shelves	Faucet lock
Glass doors in lieu of solid doors	Riser base* (field installed)
Food storage rated stainless steel interior (NSF-7)	Condensing unit on right
Single, dual or triple faucets	Wine rack
Tower placement (consult factory)	Casters or legs

Consult factory for other model configurations, options and accessories.



# **Standard Model Features**

SIS #:

#### REFRIGERATION SYSTEM

AIA #:

Performance-rated front breathing refrigeration system

Natural, environmentally-safe, high-efficiency R-290 refrigerant<sup>1</sup>

Automatic, hot gas condensate evaporator

Extra large, balanced evaporator coil

#### **CABINET ARCHITECTURE**

High density, non-CFC polyurethane foamed-in-place insulation

Front, rear and side venting louvered grills

Magnetic snap-in door gaskets

Cylinder-keyed security lock in each door

Stainless steel reinforced threshold

#### **MODEL FEATURES**

Low profile cabinet design

Electronic controller w/digital display & hi-low alarm

LED interior lighting

Continuously cooled, 3" diameter beer column with lever faucet,  ${\rm CO_2}$  pressure relief distributor and  ${\rm CO_2}$  tubing with clamps

Easily removable stainless steel drip grate with convenient front-mounted cleanout drainage hose (pan not removable)

Easily accessible and serviceable slide-out condensing unit

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

<sup>\*</sup> Adding a Riser Base increases overall height 2"

# **Model Specifications**

<b>DIMENSIONAL DATA</b>
Net Capacity (cu. ft.)

22 (623 cu l)

Width, Overall (in.) 59 (1499 mm)

Depth, Overall (in.) (incl. handles & bumpers) 29 3/16 (741 mm)

Depth, Body Only (in.) (less doors) 25 (635 mm)
Height, Overall (in.) (not incl. columns) 34 3/4 (883 mm)

Capacity: # Barrel Kegs 2
Capacity: # Straight Wall Kegs 3

Capacity: # 1/6 Size Kegs 9

No. of Doors 2

No. of Beer Columns (with single faucets) 2

### **REFRIGERANT DATA**

Condensing Unit Size (H.P.)	1/4	
Capacity (BTU/Hr)*	2025	

### **ELECTRICAL DATA**

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	3.7 (3.4)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

#### **SHIPPING DATA**

Weight (lbs.)	405 (184 kg)
Height - Crated (in.)	46 (1168 mm)
Width - Crated (in.)	65 (1651 mm)
Depth - Crated (in.)	42 (1067 mm)

\* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com


Due to our continued efforts in developing innovative products, specifications subject to change without notice.






#### © Copyright 2019. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

# **Model Plan Views**

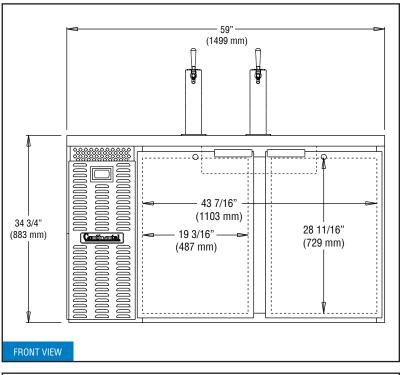

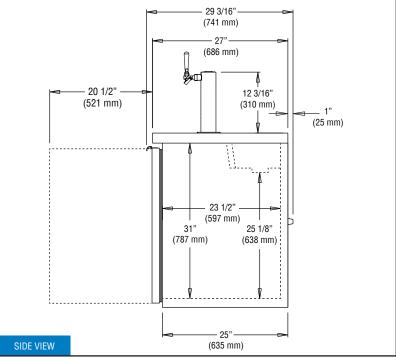

**IMPORTANT NOTE**: Models are completely front breathing and take in and exhaust air through the front grill. For proper operation, the area in front of the cabinet <u>must</u> not be obstructed in any way. A clearance of 1" on the back and 3" on the sides is recommended.