

DESIGNER LINE REFRIGERATOR/WARMER

Model: DL2RWE-PT-HD

Designer Line

2-Section Extra-Wide Dual Temp, Pass-Thru Refrigerator/Warmer with Half Doors

Refrigerator (left)/Warmer (right). Sections can be changed at time of order.

- DL2RWE-PT-HD** - Stainless steel front, aluminum end panels and interior
- DL2RWE-SA-PT-HD** - Stainless steel exterior, aluminum interior
- DL2RWE-SS-PT-HD** - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Special electrical req. (consult factory)
Chrome or stainless steel shelves	Refrigerator Section Only
Rehinging of doors (consult factory)	Add'l epoxy-coated steel shelves
Expansion valve system	Wine Rack
Pan slide assemblies	Correctional Facility Options
Casters	<ul style="list-style-type: none"> • One way security screws
Custom laminates	<ul style="list-style-type: none"> • Locking hasp (lock not included)
Full doors	<ul style="list-style-type: none"> • Stainless steel mesh cover
Hinged glass doors	<ul style="list-style-type: none"> • Coverless hinges
Increased refrigeration systems	

Consult factory for other model configurations, options and accessories.

Continental[®]
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATOR SECTION

Separate, self-contained, performance-rated "plug" refrigeration system

Environmentally-safe R-134a refrigerant

(3) heavy-duty, epoxy-coated steel shelves

WARMER SECTION

Separate, self-contained, performance-rated heating system

90°F to 180°F temperature range

Top mounted heating plenum "plug" w/circulating fan

Stainless steel strip heaters located in base of interior

(3) heavy duty, chrome-plated steel shelves

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in door gaskets

Cylinder lock in each door

Adjustable 6" stainless steel legs

MODEL FEATURES

Unique air flow distribution ducts

Automatic interior lighting

(2) electronic controllers w/digital display & hi-low alarm

Automatic, hot gas condensate evaporator

Refrigeration/heating system is readily accessible on top of cabinet, separate from the "food zone"

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled on job site

APPROVAL:

Model Specifications

DIMENSIONAL DATA [R/W]

Net Capacity (cu. ft.)	22/22 (623/623 cu l)
Width, Overall (in.)	57 (1448 mm)
Depth, Overall (in.) (incl. handles)	38 3/4 (984 mm)
Depth (in.) (less doors)	32 (813 mm)
Depth (in.) (doors open 90°)	84 (2134 mm)
Clear Door Width (in.)	21 7/8 (556 mm)
Clear Half Door Height (in.)	27 1/2 (699 mm)
Height, Overall (in.) (incl. 6" legs)	83 1/4 (2115 mm)
No. of Doors	8
No. of Shelves	6
Shelf Area (sq. ft.)	40.8 (3.8 sq m)
Tray Slide Capacity (refrigerator)	11 (per half section)
Tray Slide Capacity (warmer)	9 (top) 6 (bottom)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/4
Capacity (BTU/Hr)*	1940

ELECTRICAL DATA [R/W]

Voltage [R] (int'l)	115/60/1 (220/50/1)
Voltage [W]	208-230/60/1
Feed Wires (incl. ground)	3/3
Total Amps (int'l)	5.5 (3.5)/7.2 (7.2)
Total Wattage @ 208-230 volts	2250
10 ft. Cord/Plug (int'l)	Yes (No)/No

SHIPPING DATA

Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	64 (1626 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	133 (3766 cu l)
Weight Std - Crated (lbs.)	595 (270 kg)
Weight SS - Crated (lbs.)	625 (283 kg)

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Refrigerator Section Only:

Equipped with one NEMA-5-15P Plug (varies by country)



Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunkserry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.





Intertek



MADE IN THE U.S.A.

© Copyright 2019, Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

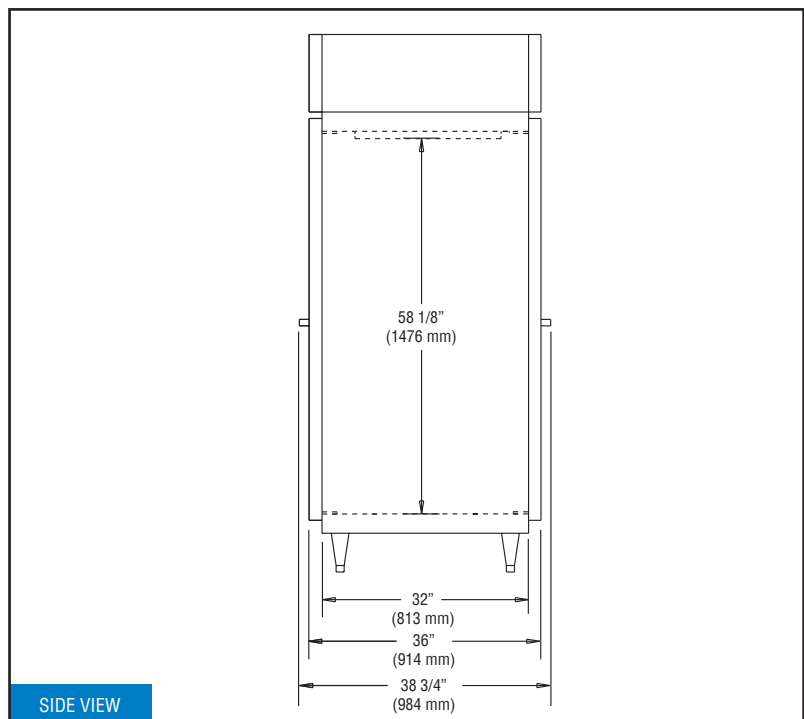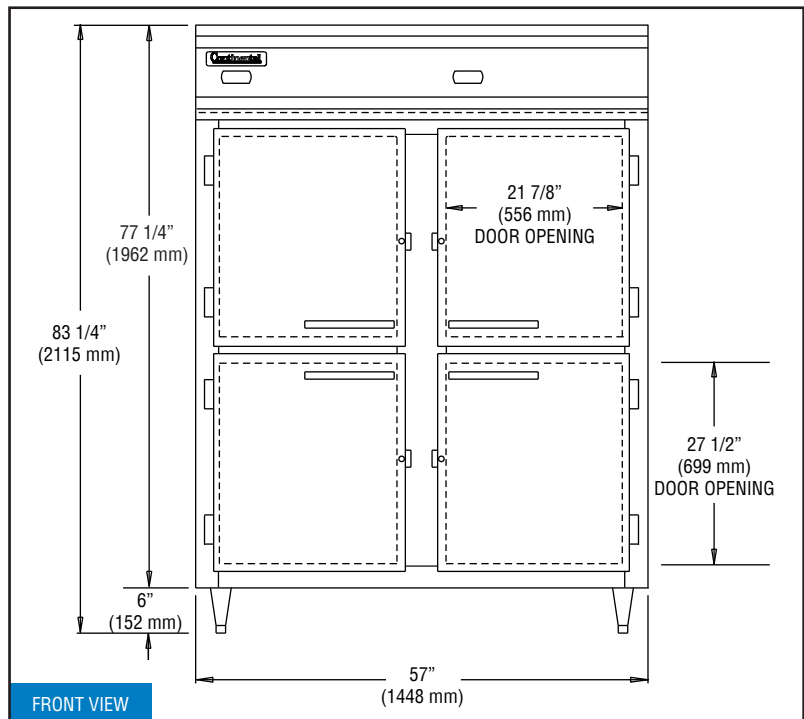

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.