



Project _____

Item # _____

Quantity _____


Drop-In Modular/Ganged Dry Heated Wells

Models: DHWBI-1, -2, -3, -4, -5, -6

The Hatco Modular/Ganged Dry Heated Wells are full-size units that are grouped together in a modular fashion to provide customers with a complete heated food offering within one piece of equipment for a clean integrated look. Unlike traditional steam tables, this unit provides dry convected heat and is specifically designed to obtain the most accurate and consistent holding temperatures. Also offers increased design flexibility and reduced installation costs due to the lack of plumbing restrictions.

Standard features

- Full-size, insulated dry wells available in 1- to 6-ganged units
- Features compact individual thermostatic controls for each well and a separate On/Off switch to retain settings
- Uniform convected air flow consistently surrounds the food pan for efficient heat transfer
- Easy-to-service design for quick replacement or service of elements
- 3/4" NPT brass drain provides easy cleanup should any food spills occur – provides additional protection to the motor and fan from any liquids that might accumulate in the well
- 6' (1829 mm) conduit is standard for convenient placement of controls

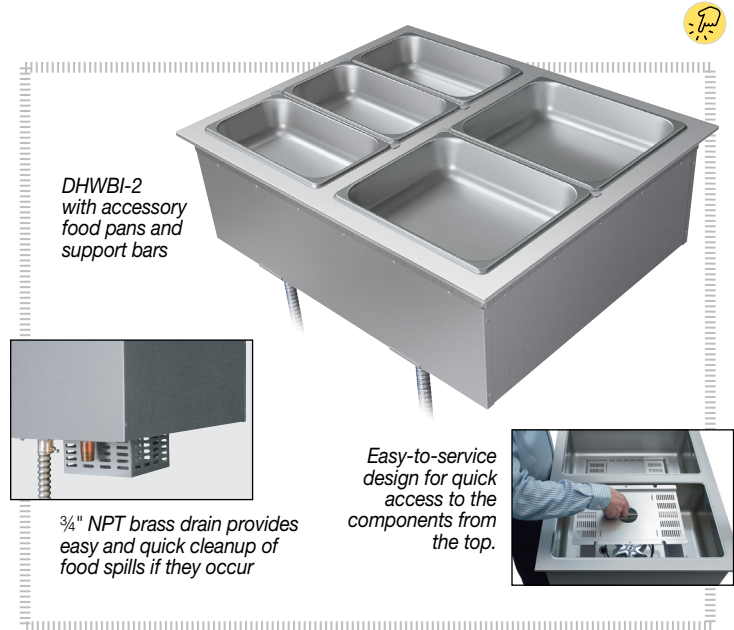

Options (available at time of purchase only)

- Attached Cord and Plug for DHWBI-1, -2, -3, -4 only (Single Phase/Single Control Box only) not for Export voltages)
- 27" D (686 mm) Bezel for Modular unit to match Hatco CWB models in a countertop display

Accessories

- Rectangular Full-Size Stainless Steel Food Pans:
- Third-Size (2.5" [64 mm] H)
 - Half-Size (2.5" [64 mm] H)
 - Full-Size (2.5" [64 mm] H)
 - Full-Size (4" [101 mm] H)
 - Full-Size (6" [152 mm] H)
- Round Food Pans:
- 4-Quart (4 Liter)
 - 7-Quart (7-Liter)
- Hinged Lid for Round Pans:
- 4-Quart (4 Liter)
 - 7-Quart (7-Liter)
- Notched Lid for Round Pans:
- 4-Quart (4 Liter)
 - 7-Quart (7-Liter)
- Stainless Steel Wire Trivets:
- Half-Size
 - Full-Size
- Adapter to Convert Warmers to hold Round Pans:
- Holds two 4-Quart (4-Liter) Rounds
 - Holds two 7-Quart (7-Liter) Rounds
- Support Bars:
- 12" (305 mm)
 - 20" (508 mm)

For operation, location and safety information, please refer to the Installation and Operating Manual.



HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (800) 558-0607 | (414) 671-6350

www.hatcocorp.com | support@hatcocorp.com | [Find a Hatco Rep](#) | [Image Library](#) | [Document Library](#) | [Chat](#)




Drop-In Modular/Ganged Dry Heated Wells

Models: DHWBI-1, -2, -3, -4, -5, -6


Ordering Instructions (Please specify the following with each order)

1. **Desired Voltage:**
 DHWBI-1, -2, -3, -4, -5, -6: 120V
 DHWBI-2, -3, -4, -5, -6: 120/208-240V
2. **Number of Modular/Ganged Heated Wells Required:**
 1-, 2-, 3-, 4-, 5- or 6-pan
NOTE: Modular/Ganged units are only offered as rectangular, full-size (12" x 20" [305 x 508 mm])
3. **Bezel**
 A. Standard: 23.625" (600 mm)
 B. Oversized: allows a 27" (686 mm) deep bezel to match Hatco CWB in a countertop display
4. **Control:**
 A. Single Control Box (standard on all units)
 B. Split Controls Boxes (optional on 4-, 5-, 6-ganged units, not available in Canada)


DHWBI-1

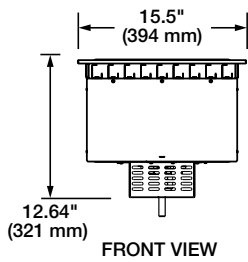


DHWBI-2

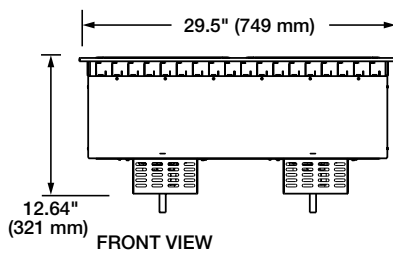


DHWBI-4

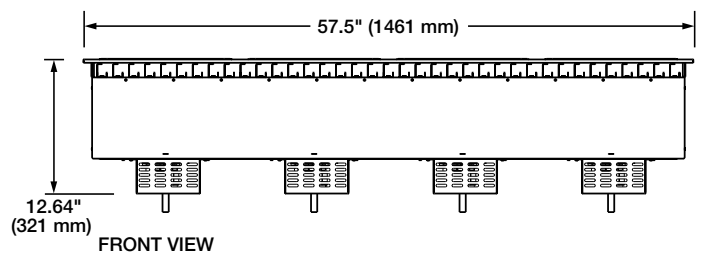


DHWBI-3

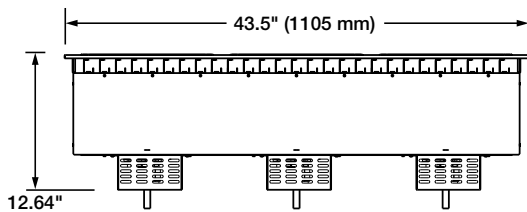


DHWBI-5

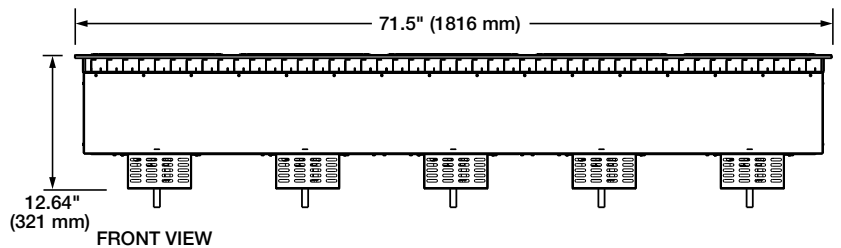

DHWBI-6

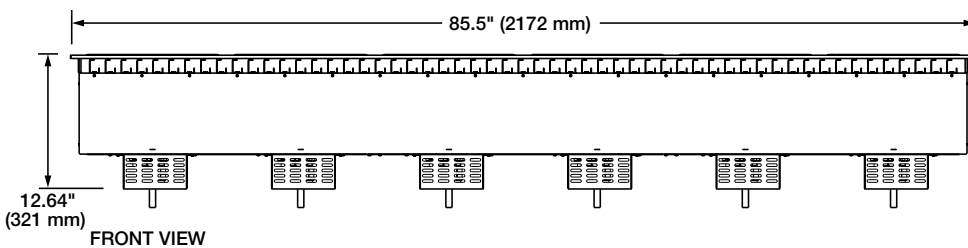

All Side Views

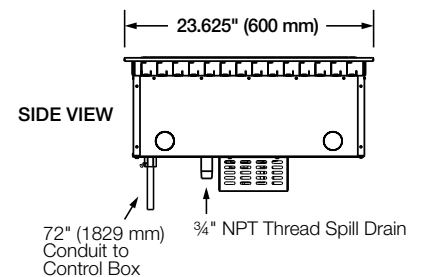

Built-In Modular/Ganged Dry Heated Wells Countertop Cut Outs

| Model | Minimum Width | Maximum Width* | Minimum Depth | Maximum Depth |
|---------|-------------------|-------------------|-----------------|----------------|
| DHWBI-1 | 14.125" (359 mm) | 14.375" (365 mm) | 22.25" (566 mm) | 22.5" (571 mm) |
| DHWBI-2 | 28.125" (715 mm) | 28.375" (720 mm) | | |
| DHWBI-3 | 42.125" (1070 mm) | 42.375" (1076 mm) | | |
| DHWBI-4 | 56.125" (1426 mm) | 56.375" (1431 mm) | | |
| DHWBI-5 | 70.125" (1782 mm) | 70.375" (1787 mm) | | |
| DHWBI-6 | 84.125" (2137 mm) | 84.375" (2143 mm) | | |

*Add 1/16" (2 mm) to Maximum Width when using EZ locking mount.




Drop-In Modular/Ganged Dry Heated Wells

Models: DHWBI-1, -2, -3, -4, -5, -6

Cutout Dimensions for Control Box

| Model | All Heights (B) | Single Configuration | Split Configuration [▲] | |
|---------|--------------------|----------------------|----------------------------------|-------------------|
| | | Width (A) | Left Control (A) | Right Control (A) |
| DHWBI-1 | 4.698" (119 mm) | 6.313" (160 mm) | Not Available | Not Available |
| DHWBI-2 | | 10.313" (262 mm) | | |
| DHWBI-3 | | 14.313" (364 mm) | 10.313" (262 mm) | 10.313" (262 mm) |
| DHWBI-4 | | 18.313" (465 mm) | | |
| DHWBI-5 | | 22.313" (567 mm) | | |
| DHWBI-6 | | 26.313" (668 mm) | | |

Control Box Opening
(Single control shown)



[▲] Not available in Canada

SPECIFICATIONS

Drop-In Modular/Ganged Dry Heated Wells with Single Controls

* Shipping weight are approximate and includes packaging.





| Model | Dimensions (Width x Depth x Height) | Volts Single Phase | Standard Single Control Box | | | | Ship Weight* |
|---------|--|-----------------------|-----------------------------|------|---------------|---------------------------|----------------------|
| | | | Watts | Amps | Optional Plug | Control Box Configuration | |
| DHWBI-1 | 15.5" x 23.625" x 12.64" (394 x 600 x 321 mm) | 120 | 960 | 8.0 | NEMA 5-15P | | 40 lbs. (18 kg) |
| DHWBI-2 | 29.5" x 23.625" x 12.64" (749 x 600 x 321 mm) | 120 | 1920 | 16.0 | NEMA 5-20P | | 98 lbs. (45 kg) |
| | | 120/208-240 | | 8.0 | NEMA L14-20P | | |
| DHWBI-3 | 43.5" x 23.625" x 12.64" (1105 x 600 x 321 mm) | 120 | 2880 | 24.0 | NEMA 5-30P | | 121 lbs. (55 kg) |
| | | 120/208-240 | | 16.0 | NEMA L14-20P | | |
| DHWBI-4 | 57.5" x 23.625" x 12.64" (1461 x 600 x 321 mm) | 120/208-240 | 3840 | 16.0 | NEMA L14-20P | | 164 lbs. (74 kg) |
| DHWBI-5 | 71.5" x 23.625" x 12.64" (1816 x 600 x 321 mm) | 120/208-240 | 4800 | 24.0 | Not Available | | 196 lbs. (89 kg) |
| DHWBI-6 | 85.5" x 23.625" x 12.64" (2172 x 600 x 321 mm) | 120/208-240 | 5760 | 24.0 | Not Available | | 233 lbs. (106 kg) |

Drop-In Modular/Ganged Dry Heated Wells with Split Controls

| Model | Dimensions (Width x Depth x Height) | Volts Single Phase | Optional Split Control Boxes | | | Ship Weight* |
|---------|--|-----------------------|------------------------------|---------------------------|---------------------------|----------------------|
| | | | Watts (per Control Box) | Amps (per Control Box) | Control Box Configuration | |
| DHWBI-4 | 57.5" x 23.625" x 12.64" (1461 x 600 x 321 mm) | 120 | 2 POS: 1920W 2 POS: 1920W | 2 POS: 16A 2 POS: 16A | (Not available in Canada) | 164 lbs. (74 kg) |
| | | 120/208-240 | 2 POS: 1920W 2 POS: 1920W | 2 POS: 8A 2 POS: 8A | | |
| DHWBI-5 | 71.5" x 23.625" x 12.64" (1816 x 600 x 321 mm) | 120 | 2 POS: 1924W 3 POS: 2880W | 2 POS: 16A 3 POS: 24A | (Not available in Canada) | 196 lbs. (89 kg) |
| | | 120/208-240 | 2 POS: 1920W 3 POS: 2880W | 2 POS: 8A 3 POS: 16A | | |
| DHWBI-6 | 85.5" x 23.625" x 12.64" (2172 x 600 x 321 mm) | 120 | 2 POS: 2880W 2 POS: 2880W | 2 POS: 24A 2 POS: 24A | (Not available in Canada) | 233 lbs. (106 kg) |
| | | 120/208-240 | 2 POS: 2880W 2 POS: 2880W | 2 POS: 16A 2 POS: 16A | | |

PLUG CONFIGURATIONS

Please refer to electrical specification chart.



PRODUCT SPECS

Drop-In Modular/Ganged Dry Heated Wells

The Modular Ganged Dry Heated Well shall be a Modelas manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Modular/Ganged Dry Well shall be rated atwatts,volts, and be....inches (millimeters) in overall width and beinches (millimeters) in overall depth. It shall consist of stainless and aluminized steel housing with a metal sheathed

heating coil, fan, fan motor, baffles, EZ locking hardware for installation, stainless bezel, and an electronic temperature control.

Warranty consists of 24/7 parts and service assistance (US and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (800) 558-0607 | (414) 671-6350



www.hatcocorp.com

support@hatcocorp.com

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)

[Chat](#)