

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

# HORIZON TOP MOUNT REACH-IN

HR3HC Glass Triple Door Reach-In Refrigerator Hydrocarbon Series

MODEL: HR3HC-1G



3 Year Parts / Labor Warranty **Additional 4 Year Compressor Warranty** 

## **CABINET CONSTRUCTION**

- Exterior is stainless steel front and gray painted sides
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- One piece grille
- LED interior light
- Self-closing door with 120° stay-open feature, on cam-lift hinges
- Snap-in magnetic gaskets for positive door seal
- Nine (9) heavy-duty epoxy coated wire shelves
- 6" Heavy-duty casters, two (2) with brakes
- 8' Cord and plug (see electrical data for details)

### **OPTIONS & ACCESSORIES**

- Tray slide pair, 1 tray slide set for (1) 18" x 26" or (2) 14" x 18" pans (A)
- Stainless steel universal tray slide pair,1 tray slide set for (1) 18" x 26" or (2) 14" x 18" pans (AC)
- Tray slide kit #4 (19 sets per half section)
- Additional shelves
- · Shelf clips
- Door locks
- · Stainless steel breaker
- 6" Legs seismic/flanged
- 3" Casters
- Remote option\* (see note on back page)

## **FINISH OPTIONS**

HR Standard

(S/S front, continuous coil coated sides, aluminum interior)

(S/S front, S/S sides, aluminum interior)

(S/S front, continuous coil coated sides, S/S interior)

HRPS

(Complete S/S exterior & interior)

#### REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Hot gas condensate evaporator
- Adaptive defrost
- Epoxy coated evaporator coil
- Maintains product temperatures between 36°F and 38°F
















MODEL	HR3HC-1G	
EXTERNAL DIMENSIONAL DATA		
Width Overall	78"	
Depth Overall with Handle	33 %"	
Height Overall	85"	
Number of Doors	3	
Depth with Door Open 90°	55 ½"	
Door Opening (in)	21 %" x 61 ¾"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	71.52	
Internal Width Overall (in)	74"	
Internal Depth Overall (in)	25 1/8"	
Internal Height Overall (in)	62"	
Number of Shelves	9	
ELECTRICAL DATA		
Full Load Amperes 115/60/1	6.0	
REFRIGERATION DATA		
Horsepower	1/3	
Capacity (BTU/Hr)	2800	
Heat Rejection (BTU/Hr)	4200	
Charge (lbs/grams)	0.3307/150	
SHIPPING DATA		
Gross Weight (crated lbs)	737 lbs	
Height - Crated	88"	
Width - Crated	80"	
Depth - Crated	36"	

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

# Top Mount Reach-In Refrigerator Model: HR3HC-1G

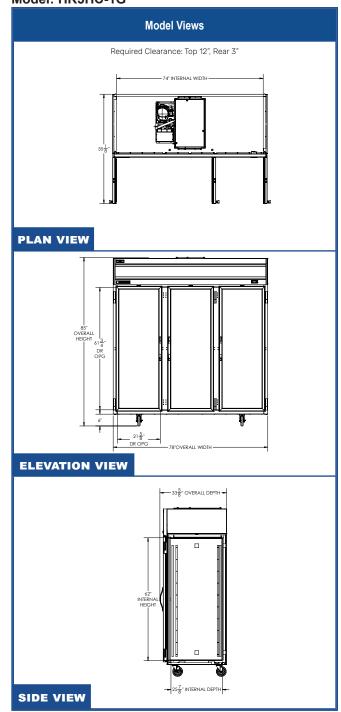

## **ELECTRICAL CONNECTION**



Unit pre-wired at factory and include 8' long cord and plug set.



