

# P-ROLL 320/1 PLUS P-ROLL 420/2 PLUS P-ROLL 420/2 RP PLUS

*Dough Rollers*



**P-ROLL 420/2 PLUS**  
with optional pedal controls



### **P-ROLL 420 RP PLUS**

The sheeters have a parallel dough roller that requires a simple and quick pass. Ideal for rectangular products 12 1/2" top and 16 1/2" bottom rolling diameter  
minimum rollers gap: 1/32" (0.8mm)  
maximum rollers gap: 9/32" (7mm)

- Designed for pizza, bread, focaccia, calzones, roti, pita bread, flour tortillas, cookies, pie crusts, sweet doughs, rolled-in dough, cinnamon rolls, danish, pierogis etc. with an absorption rate of 50-60%
- Output of 250 pieces per hour
- Ergonomic, front infeed and discharge design, compact footprint, heavy gauge AISI 304 stainless steel construction
- Durable gear drive transmission
- Convenient side mounted knurled metal rotary control knobs
- The robust stainless steel, see-through hand guards provide optimal visibility for a safe and comfortable operation
- Hand guards are interlocked for automatic shut-off and remove easily
- Non-stick rollers resist rust, scratches and dents
- The laminated slide removes easily for a quick yet thorough cleaning
- Scrapers readily removable for easy cleaning
- IP67 water/dust proof switch, no-volt release. Thermal overload protection and reset button

Optional:  
Foot-pedal

**Motor:** 0.33 Hp (240W)  
**Electrical:** 110V AC, 60Hz, 3.4Amp



Certified to UL 763 and NSF 08  
 Certified to CSA Standard C22.2



Metal gears transmission



Plus versions with IP 67 stainless steel controls



Adjustable thickness by plastic knobs





Optional foot-pedal



**P-ROLL 320/1 PLUS**

Single pass, table-top design  
 12<sup>1/2</sup>" rolling diameter  
 minimum rollers gap: 1/32" (0.8mm)  
 maximum rollers gap: 9/32" (7mm)

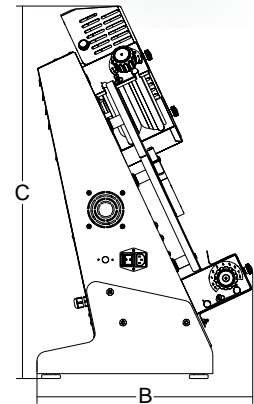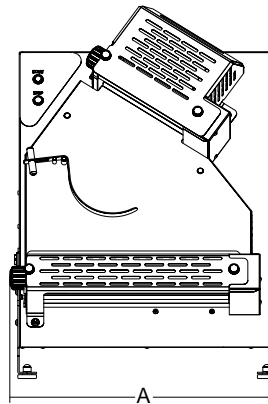

	Power	Power source	Roller dimensions	Roller dimensions			Net weight	Shipping	Gross weight
	watt/Hp		inch.	A	B	C			
<b>P-Roll 320/1 Plus</b>	240/0,33	110V/60Hz	12 <sup>19/32</sup> "	16 <sup>1/4</sup> "	12 <sup>1/2</sup> "	18 <sup>1/2</sup> "	64	30" x 23" x 25"	90
<b>P-Roll 420/2 Plus</b>	240/0,33	110V/60Hz	8 <sup>21/32</sup> " / 16 <sup>17/32</sup> "	20 <sup>1/4</sup> "	12 <sup>1/2</sup> "	31 <sup>1/2</sup> "	105	30" x 23" x 41"	130
<b>P-Roll 420 RP Plus</b>	240/0,33	110V/60Hz	12 <sup>19/32</sup> " / 16 <sup>17/32</sup> "	20 <sup>1/4</sup> "	12 <sup>1/2</sup> "	22 <sup>1/2</sup> "	108	30" x 23" x 41"	130