

SELF-CONTAINED DIRECT DRAW CONCESSIONAIRE 2- AND 3-DOOR





ecos friendly R290 Hydrocarbon Refrigerant

DDC92 shown with optional Draft Arm Towers. 6%" casters included.


JOB		
AREA		
ITEM NO.		
MODEL NO.		
DDC68	2-Door Model	
DDC92	3-Door Model	

Note: NSF/ANSI Standard 7 Listed for the storage and display of bottled or canned products only.

MODEL NUMBERS		DDC68	DDC92
NUMBER OF DOORS		2	3
NOMBER OF DOORS	Length - in. (mm)	68 (1727)	92 (2337)
EXTERIOR CABINET DIMENSIONS	Depth - in. (mm)	24¾ (629)	24 ³ / ₄ (629)
	Height - in. (mm)	34%6 (878)	34% (878)
INTERIOR CABINET DIMENSIONS	Length - in. (mm)	44 (118)	68 (1727)
	Depth - in. (mm)	18¾ (476)	18¾ (476)
	Height - in. (mm)	281/2 (724)	28½ (724)
		. ,	
* INTERNAL VOLUME, Net. Cu. Ft. (Litres)		16 (453)	24.8 (702)
MATERIALS		All stainless steel: From	
SHIPPING WEIGHT, Lbs. (kg.)		365 (165)	515 (233)
ELECTRICAL SPECIFICATIONS	Electrical Supply	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph
	Running Load Amps	2.5	4.2
	Electrical Connection	Cord connected	Cord connected
	Cord Plug Type	NEMA 5-15	NEMA 5-15
	Cord Length	8'	8'
	Defrost Initiation	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle
	Thermostat	Digital control	Digital control
REFRIGERATION SPECIFICATIONS	Horsepower	1/5	1/4
	Refrigerant	R290	R290
	Refrigerant Charge (grams)	100	90
	Factory Temperature Setting-Refriger- ator F (C)	38° (3.3°)	38° (3.3°)
	Temperature Range-Refrigerator F (C)	33°-40° (0.5°-4.5°)	33°-40° (0.5°-4.5°)
	Condensing Unit Location	Left	Left
	Expansion Device	Capillary tube	Capillary tube
	Pull Out Condensing Unit	Yes	Yes
	Front Vented	Yes	Yes
	Floor Drain Included	Yes	Yes
PLUMBING	Evaporator Condensate	Automatically	Automatically

* Note: For keg capacities and layouts, go to www.perlick.com.

Form No. 95170 Rev. 12.18.2018

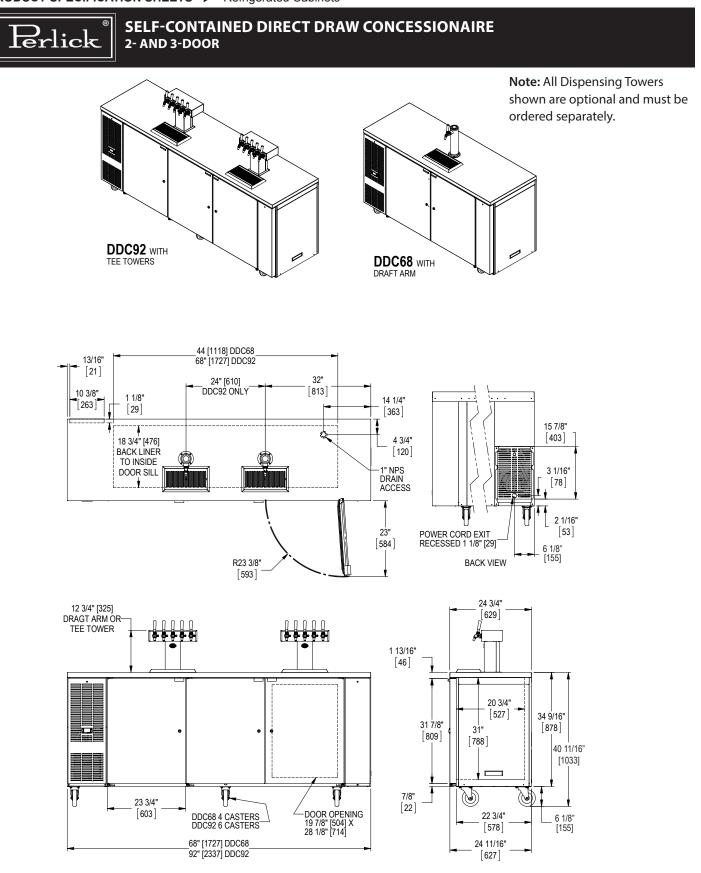

California Prop 65 Notice:

WARNING: The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm, For more information go to www.P65Warnings.ca.gov.

Form No. 95170 Rev. 12.18.2018