BEVERAGE-AIR

WORKTOP REFRIGERATOR

WTR60AHC Solid Door With Flat Top Hydrocarbon Series

| Project: | AIA# |
|-----------|------|
| Item: | |
| Location: | SIS# |
| Approved: | |

MODEL: WTR60AHC-FLT



3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides, door and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Stainless steel top for added durability
- Full electronic control
- Interior thermometer is standard
- Flat top
- Self-closing doors with 120° stay-open feature, on cartridge style hinges
- Magnetic gasket attached to each door for positive seal
- 6" Casters, two (2) with brakes standard
- Two epoxy-coated steel wire shelves per door section
- Field-reversible door (hinge kit not included)

OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel interior
- 16 Gauge stainless steel top
- Additional shelves
- Shelf clips
- Glass door option
- Right or left hinged door
- Locks (solid doors only)
- Wire shelf divider
- Cutting board
- 3" Casters
- 6" legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F





3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com




| MODEL | WTR60AHC-FLT | |
|------------------------------------|---------------------|--|
| EXTERNAL DIMENSIONAL DATA | | |
| Width Overall | 60" | |
| Depth Overall with Handle & Bumper | 32" | |
| Height Overall with 6" Casters | 35 ⁵ึึ | |
| Number of Doors | 2 | |
| Depth with Door Open 90° | 55 ¼" | |
| Door Opening | 22 ⁵⁄ଃ" x 21 ⁵⁄ଃ" | |
| INTERNAL DIMENSIONAL DATA | | |
| NET Capacity (cubic ft.) | 14.75 | |
| Internal Width Overall (in) | 56" | |
| Internal Depth Overall (in) | 15 3 ⁄8" | |
| Internal Height Overall (in) | 23" | |
| Number of Shelves | 4 | |
| ELECTRICAL DATA | | |
| Full Load Amperes | 3.0 | |
| REFRIGERATION DATA | | |
| Horsepower | 1/5 | |
| Capacity (BTU/Hr) | 1350 | |
| SHIPPING DATA | | |
| Gross Weight - Crated | 320 lbs | |
| Height - Crated | 36" | |
| Width - Crated | 63" | |
| Depth - Crated | 33" | |

*NOTE: Remote units are field wired and come with 6" legs.

Refrigerant must be specified at time of order.

Worktop Refrigerator Models: WTR60AHC-FLT

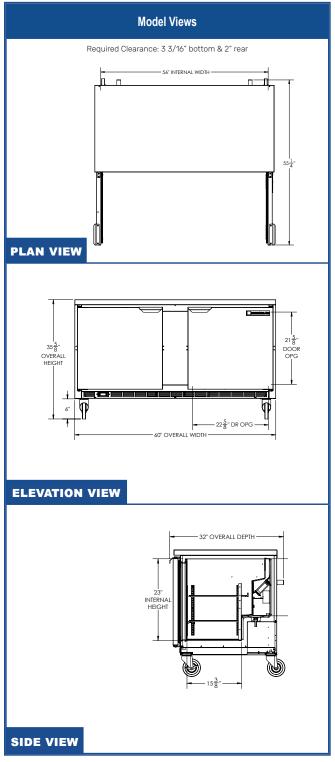

*ELECTRICAL CONNECTION



Un 115/60/1 fac NEMA 5-15P Ion

Unit pre-wired at factory and include 8' long cord and plug set.



3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com

an Ali Group Compar

